

T SERIES



IP65 Weather Protection



Excellent Low Light Sensitivity



Rugged cast Aluminium Chassis



WiFi module fitted as standard



7 Year Warranty Standard



Leading edge capacitor control technology



Dynamic MPPT efficiency >99.9%
(Euro efficiency >97.2%)

High quality electrolytic capacitors from EPCOS & NCC

Core components, from Fairchild & Infineon, long lifetime and high efficiency

Intelligent microchips from ST Microelectronics enable the inverter to operate from 75Volts

LDC display has a 50,000 hr continuous operation lifespan

Industry standard MC4 Connectors

Amorphous Core Components from leading technology supplier Hitachi ensure this inverter is efficient & stable in operation

Dual Core Processor from Texas Instruments uses the same technology found on smartphones and tablets

Weatherproof AC connectors

Smart WiFi system from MARVELL allows consumers to monitor their PV system performance in real time

TECHNOLOGY PARAMETERS

Model No	T1500TL	T2200TL	T3000TL
DC side/Input parameters			
Max. DC power [W]	1800	2500	3400
Max. DC voltage [Vdc]	450	500	550
Min. System start/Shut down voltage [Vdc]	75/100	75/100	75/100
MPPT voltage range[Vdc]	100~450	100~500	100~550
Max. input current [A]	10	13	15
Number of MPP trackers	1	1	1
Strings per MPP tracker	1	2	2
AC side/output parameters			
Nominal output power [W]	1500	2200	3000
Maximum output power [W]	1650	2420	3300
Nominal output voltage/range [V]	208,220,230,240/180~265	208,220,230,240/180~265	208,220,230,240/180~265
AC grid frequency/range [Hz]	50,60/±4.5 auto-selection	50,60/±4.5 auto-selection	50,60/±4.5 auto-selection
Maximum output current [A]	8	12	17
AC connection(with PE)	Single phase	Single phase	Single phase
Current distortion(THDi) [%]	<1.5	<1.5	<1.5
Power factor [%]	> 99.9	> 99.9	> 99.9
Efficiency			
Maximum conversion efficiency[%]	97.3	97.4	97.5
European efficiency[%]	97.0	97.1	97.2
MPPT efficiency[%]	99.9	99.9	99.9
Protection			
DC reverse-polarity protection	yes	yes	yes
Short circuit protection	yes	yes	yes
Ground fault/residential current monitoring	yes	yes	yes
Grid monitoring	yes	yes	yes
DC/AC side varistors(thermally protected)	yes	yes	yes
General Parameters			
Dimension(L/W/H)[mm]	375*480*136		
Weight (kg)	14.5	15	15.6
Embedded DC Switch	Optional		
Night Mode support	Optional		
Night power consumption[W]	< 0.2		
Isolation type	Transformerless		
Protection degree	IP65		
Operation temperature[°C]	-25 ~ 60		
Heat Dissipation	Convection		
Acoustic noise level[dB]	<25		
Altitude[m]	<2000 without power derating		
Storage temperature[°C]	-30 ~ 80		
Real Time Clock module	yes		
LCD Display	Graphic and digital segment		
Communication Interface	Standard Wifi		

Warranty: 7 year standard. 10/15/20 year extension options *More technical characteristics are available on demand and customized.

S SERIES



IP65 Weather Protection



Excellent Low Light Sensitivity



Rugged cast Aluminium Chassis



WiFi module fitted as standard



7 Year Warranty Standard



Leading edge capacitor control technology



Dynamic MPPT efficiency >99.9%
(Euro efficiency >97.3%)


High quality electrolytic capacitors from EPCOS & NCC

Core components, from Fairchild & Infineon, long lifetime and high efficiency

Latest DC capacitors, dual dynamic trackers, make your system always work at max power

Intelligent microchips from ST Microelectronics enable the inverter to operate from 75Volts

Industry standard MC4 Connectors

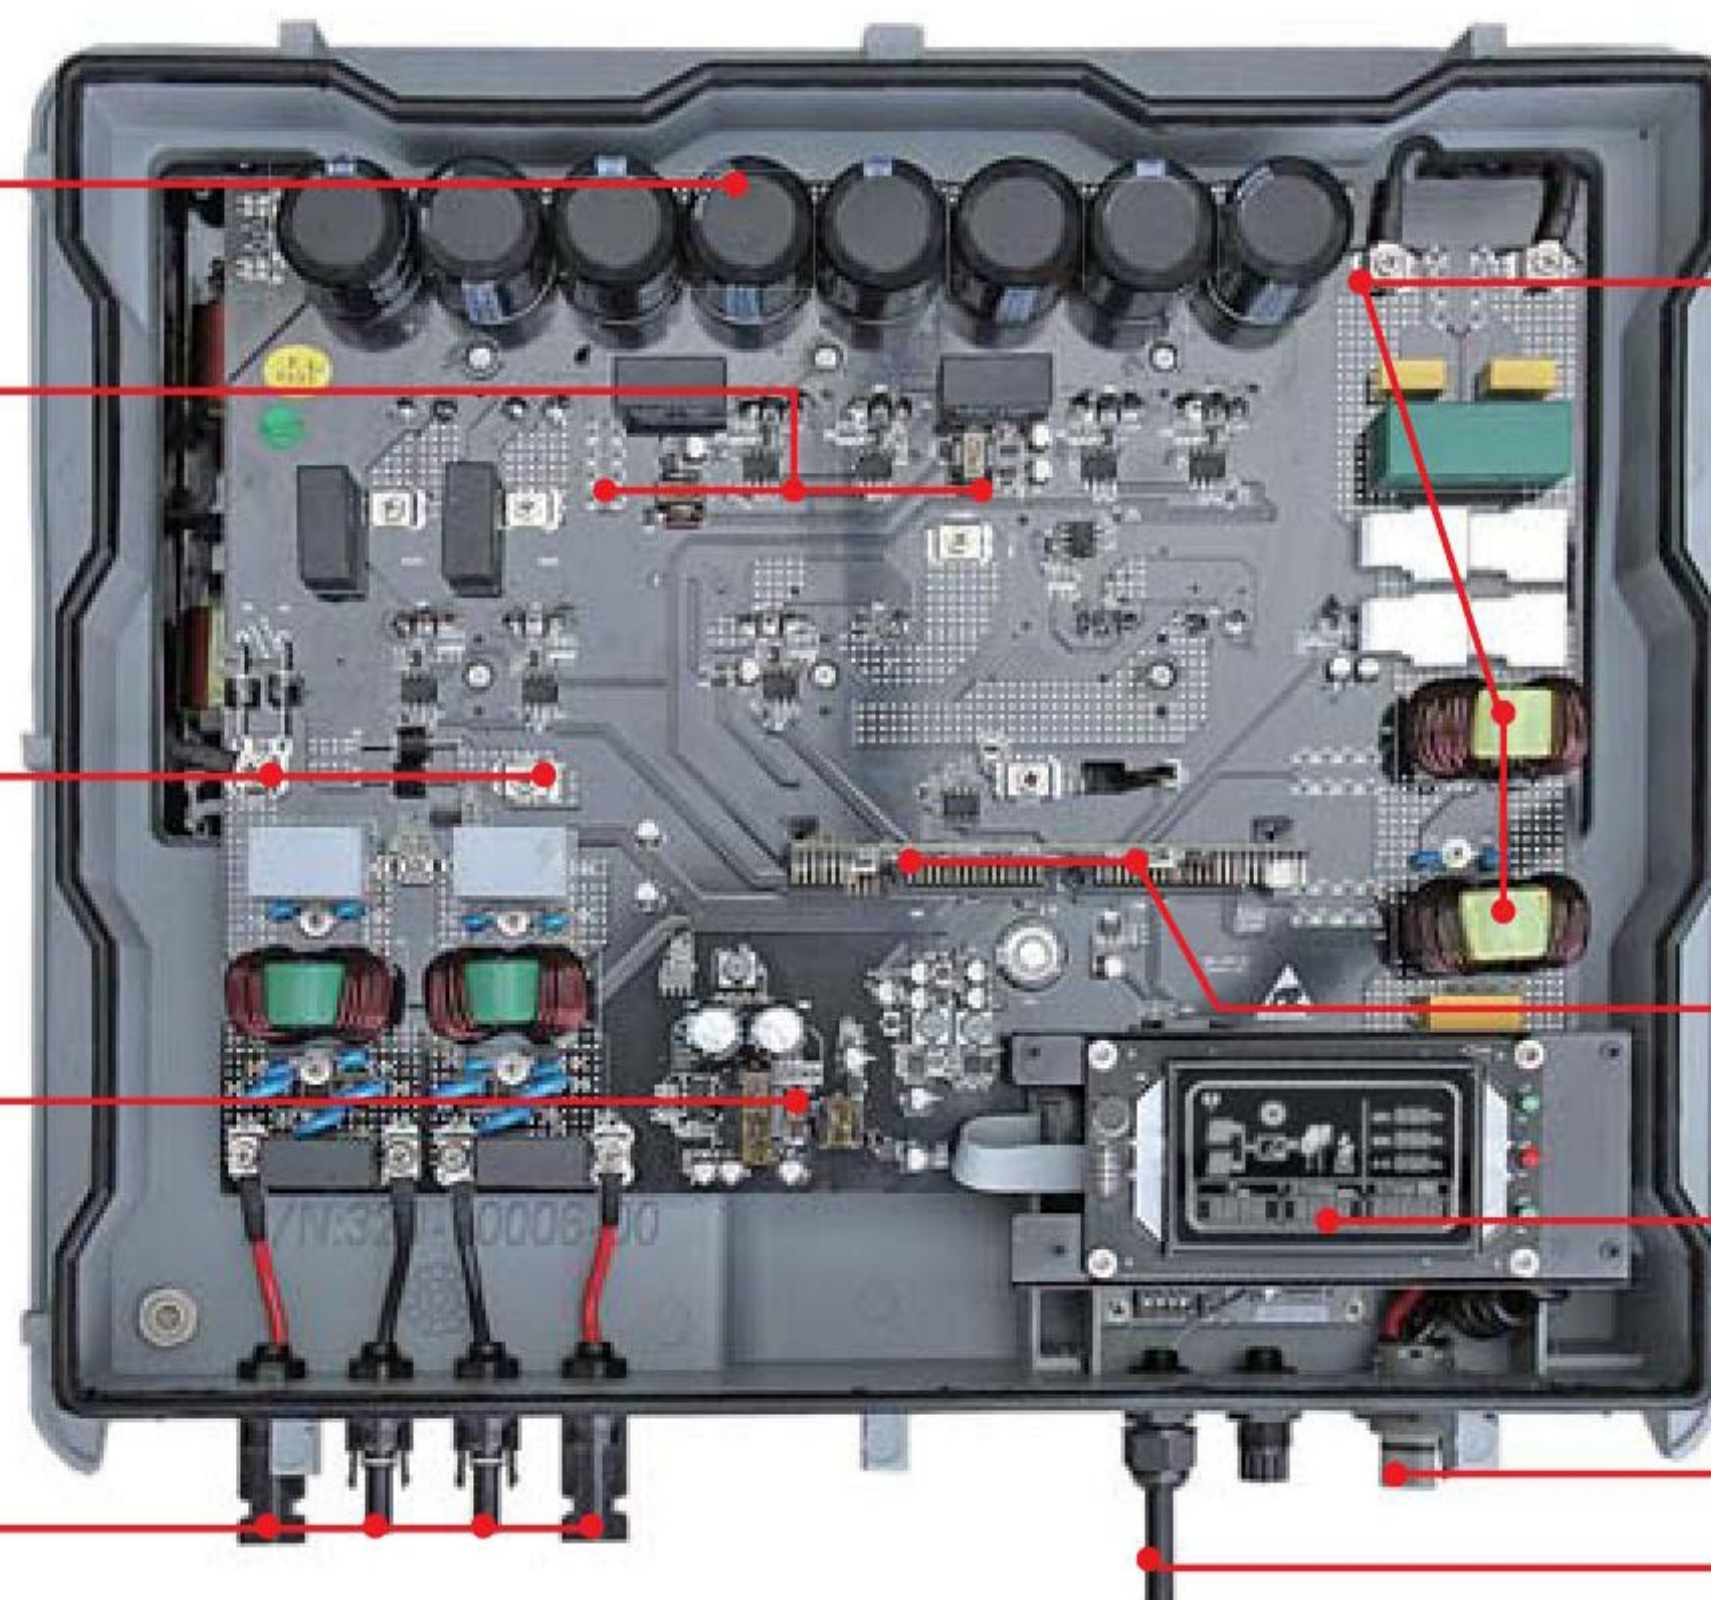

Amorphous Core Components from leading technology supplier Hitachi ensure this inverter is efficient & stable in operation

Dual Core Processor from Texas Instruments uses the same technology found on smartphones and tablets

LCD display has a 50,000 hrs continuous operation lifespan

Weatherproof AC connectors

Smart WiFi system from MARVELL allows consumers to monitor their PV system performance in real time

TECHNOLOGY PARAMETERS

Model No	S3600TL	S4400TL	S5000TL
DC side/Input parameters			
Max. DC power [W]	3600	4400	5000
Max. DC voltage [Vdc]	550	550	550
Min. System start/Shut down voltage [Vdc]	75/100	75/100	75/100
MPPT voltage range[Vdc]	100~550	100~550	100~550
Max. input current [A]	13.5/13.5	13.5/13.5	15/15
Number of MPP trackers	2	2	2
Strings per MPP tracker	1	1	1
AC side/output parameters			
Nominal output power [W]	3300	4000	4600
Maximum output power [W]	3600	4400	5000
Nominal output voltage/range [V]	208,220,230,240/180~270	208,220,230,240/180~270	208,220,230,240/180~270
AC grid frequency/range [Hz]	50,60/±4.5 auto-selection	50,60/±4.5 auto-selection	50,60/±4.5 auto-selection
Maximum output current [A]	16	21	23
AC connection(with PE)	Single phase	Single phase	Single phase
Current distortion(THDi) [%]	<2.5	<2.5	<2.5
Power factor [%]	> 99.95	> 99.95	> 99.95
Efficiency			
Maximum conversion efficiency[%]	97.5	97.6	97.8
European efficiency[%]	97.1	97.2	97.3
MPPT efficiency[%]	99.9	99.9	99.9
Protection			
DC reverse-polarity protection	yes	yes	yes
Short circuit protection	yes	yes	yes
Ground fault/residential current monitoring	yes	yes	yes
Grid monitoring	yes	yes	yes
DC/AC side varistors(thermally protected)	yes	yes	yes
General Parameters			
Dimension(L/W/H)[mm]	480*400*180		
Weight (kg)	20.1		
Embedded DC Switch	Optional		
Night Mode support	Optional		
Night power consumption[W]	< 0.2		
Isolation type	Transformerless		
Protection degree	IP65		
Operation temperature[°C]	-25 ~ 60		
Heat Dissipation	Convection		
Acoustic noise level[dB]	<25		
Altitude[m]	<2000 without power derating		
Storage temperature[°C]	-30 ~ 80		
Real Time Clock module	yes		
LCD Display	Graphic and digital segment		
Communication Interface	Standard Wifi		

Warranty: 7 year standard. 10/15/20 year extension options *More technical characteristics are available on demand and customized.